

EWEM

Darkroom Safelights

EWEM darkroom safelights are available as wall or ceiling model for indirect lighting of the working place. All models are suitable for blue and green sensitive, orthochromatic films.



Wall mounted lamp DWL cat.-No. 180600

The darkroom safelight dwl was equipped for high sensitive filmmaterial with an integrated adjustable screen.

Thereby the brightness can be adapted to diverse room sizes.

The tube can be changed simply.

Technical Data:

power supply: 230 V 50 Hz
 current consumption: 0.25 A
 space required: 50 x 12 x 12 cm
 weight: approx. 2 kg



Wall mounted lamp DWS cat.-No. 180700

The new Darkroom safelight type DWS is equipped with a swivelling filter


By the variable light strip the light can be adapted to different room sizes.

With an electronic ballast for a quick start, flicker-free light, a long lifetime of the tube and energy saving.

The lamp change can be carried out very simply by a house technician.

Technical Data:

power supply: 220 - 240V / 50 - 60Hz
 current consumption: 0.06 A
 fluorescent tube: 8 W
 space required: 50 x 12 x 12 cm
 weight: 0,9 kg

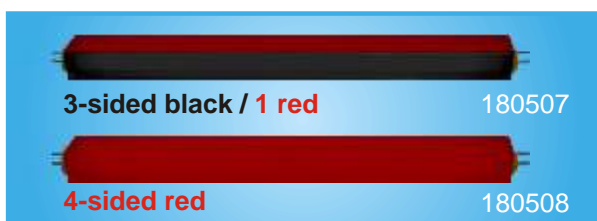

Spare tubes for former models


complete with filter

for Typ DW-3/1. 180507

for Typ DW, DW/HS and DD 180508

All units in compliance IEC 601-1

Alterations reserved!

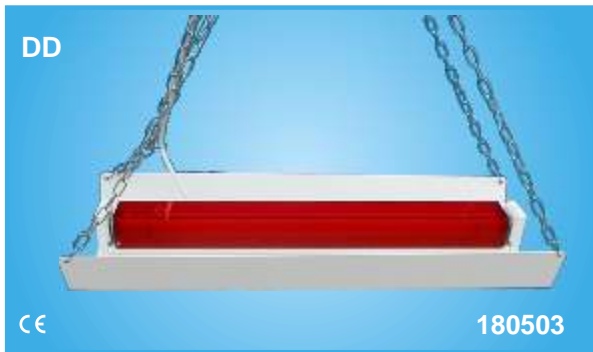

Ceiling mounted lamp DD cat.-No. 180503

chain suspension adjustable to fit room size
 cable 1.5 m for stationary connection

Technical data:

power supply:	230 V 50 Hz
current consumption:	0.25 A
space required::	50 x 25 x 20 cm
weight:	3,5 kg

NEW



Ceiling mounted lamp DD cat.-No. 180504

chain suspension adjustable to fit room size
 cable 1.5 m for stationary connection

Technical data:

power supply:	230 V 50 Hz
current consumption:	0.25 A
space required:	50 x 25 x 20 cm
weight:	3,5 kg

The darkroom safelight dd was equipped for high sensitive filmmaterial with an integrated adjustable screen.

Thereby the brightness can be adapted to diverse room sizes.

The tube can be changed simply.