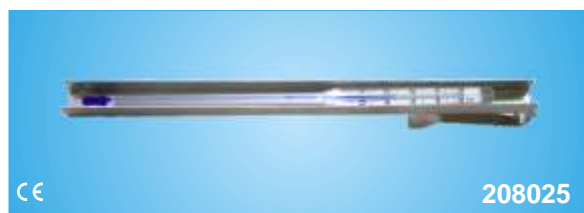


**Alarm timer**

cat. No. 207570

with programmable count-down,
minutes and seconds easily adjustable from
1 sec. to 59' 59".
dim: 52 x 67 x 25 mm
net weight: 41 g

**Tank thermometer**

cat. No. 208025

with suspension hook,
graduated in centigrade 10 to 50°C
depth of immersion: 250 mm
dim.: 260 mm long
net weight: 50 g

**Tank heating unit TTR 1005 cat. No. 209000**

for heating of developer fluid in manual
processing tanks. Suitable for all EWEM
processing tank sets (except dental film unit).
The immersion heater with titanium tube is inte-
grated in the tank. The range of the temperature
is from +15 to +35°C.

technical data:
power supply: 230 V ac 50 Hz
power consumption: ca. 150 W
dim. heating stick: 300 mm length, Ø 25 mm
dim. control unit: 120 x 65 x 55 mm
temperature precision: $\pm 0,6$ °C

**Tank heating unit TTR 2005 cat. No. 209500**

for heating of developer fluid in manual
processing tanks. Suitable for all EWEM
processing tank sets (except dental film unit).
The immersion heater with titanium tube is inte-
grated in the tank. The control of the temperature
is carried out in 1°C steps.

technical data:
power supply: 230 V ac 50 Hz
power consumption: ca. 150 W
dim. heating stick: 300 mm length, Ø 25 mm
dim. control unit: 100 x 260 x 265 mm
temperature precision: $\pm 0,1$ °C

Alterations reserved!